

PMMA(Poly(methyl methacrylate))

1. Analytical Condition

YL GPC Analyzer

Mobile phase : THF

Flow rate : 1 mL/min

Injection volume : 100 μl

Column Temp : 35°C

Detector : RID, 35 °C


Column : Shodex KF-802 (7.8 * 300 mm)

Shodex KF-803 (7.8 * 300 mm)

Shodex KF-804 (7.8 * 300 mm)

* STD (PMMA - Poly(methyl methacrylate))

- STD 1 : Mp 10,100
- STD 2 : Mp 31,600
- STD 3 : Mp 54,500 / 2,580

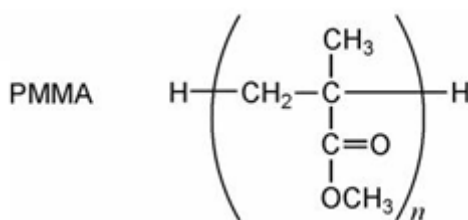

* **Sample** : Buthyl Acrylate



PMMA(Poly(methyl methacrylate))

2. Chromatogram

